

O'WOOD

by ošukalns

DECKING

THE BEST OF WOOD FOR
WELLNESS SPACE, INTERIOR
AND EXTERIOR

Respecting forest since 1993

To create the best timber products that will serve reliably and for a long time, technology is not enough. To get the best out of the forest, you have to respect the forest. You have to be like the forest.

Green, trustworthy, and patient.

O'WOOD

by ošukalns



The O'Wood factory and its craftsmen have been growing professionally for over 30 years delivering quality products in ever increasing array of new areas.

Currently the activities of the company OSUKALNS GROUP include logging, timber processing, road construction, mining of natural resources, asphalt concrete production, real estate business, trade and service of spare parts of trucks, and production of heat and electricity.

We are a powerful team of timber processing professionals with respect for nature and its power. We pay close attention to detail in every product we make.



In the heart of Europe

The O'Wood factory is located in one of the greenest areas in the world, just a few kilometers from the cleanest lake and the lushest forests in Latvia.





Jekabpils is the small city in Latvia, but for almost 800 years its development has been driven by its excellent location.




Qualitative decking never goes out of fashion!

An elegant terrace by the house or in the garden opens an extra dimension to your senses, both leisurely enjoying a holiday morning breakfast and celebrating life at a garden party with relatives and friends. Thermo-treated decking boards will be the best choice for the construction of your terrace.

DECKING

PROFILE	WOOD TYPE	THICKNESS	WIDTH (mm)	COVERING WIDTH (mm)	PCS PER BUNDLE/PACK
SENOFIX 	Thermo pine	26	115	115	3/243
		26	140	140	3/216
	Thermo ash	20	112	112	4/252
		20	132	132	4/224
	Thermo birch	20	112	112	4/252
		20	132	132	4/224
	Thermo maple	20	112	112	4/252
		20	132	132	4/224
FAS PANEL / FLOOR BOARD 	Thermo pine	19	115	115	4/360
		19	140	140	4/320
		26	115	115	3/243
		26	140	140	3/216
		26	140	140	3/216
TRUST V SHARP - DECKING BOARD 	Thermo pine	26	115	121	3/243
		26	140	146	3/216
TRUST 	Thermo pine	26	115	115	3/243
		26	140	140	3/216

DECKING

PROFILE	WOOD TYPE	THICKNESS	WIDTH (mm)	COVERING WIDTH (mm)	PCS PER BUNDLE/PACK
S4S* 	Thermo pine / Thermo spruce	42	68	68	1/288
		42	90	90	1/216
		42	115	115	1/162
		42	140	140	1/144
		26	115	115	3/243
		26	140	140	3/216
		19	115	115	4/360
		19	140	140	4/320

*Fixing possible only with visible screws.

FIXING OPTIONS

TENI fixing system



SENOFIX fixing system



Fixing with visible screws



Fixing with visible screws is the easiest, cheapest and fastest way of fixing. But, at the same time, it makes the shortest lifetime of the decking as it touches the construction beam and wood is not ventilated.


THERMO WOOD

- Thermal modification of wood is a so-called open system developed in Finland.
- We apply fundamentally higher temperatures than common.
- By applying steam and high temperatures we achieve durability class 1.
- For exterior application we seek to achieve best possible dimensional stability and durability against wood decaying fungi.



After installation

Untreated wood exposed to UV light

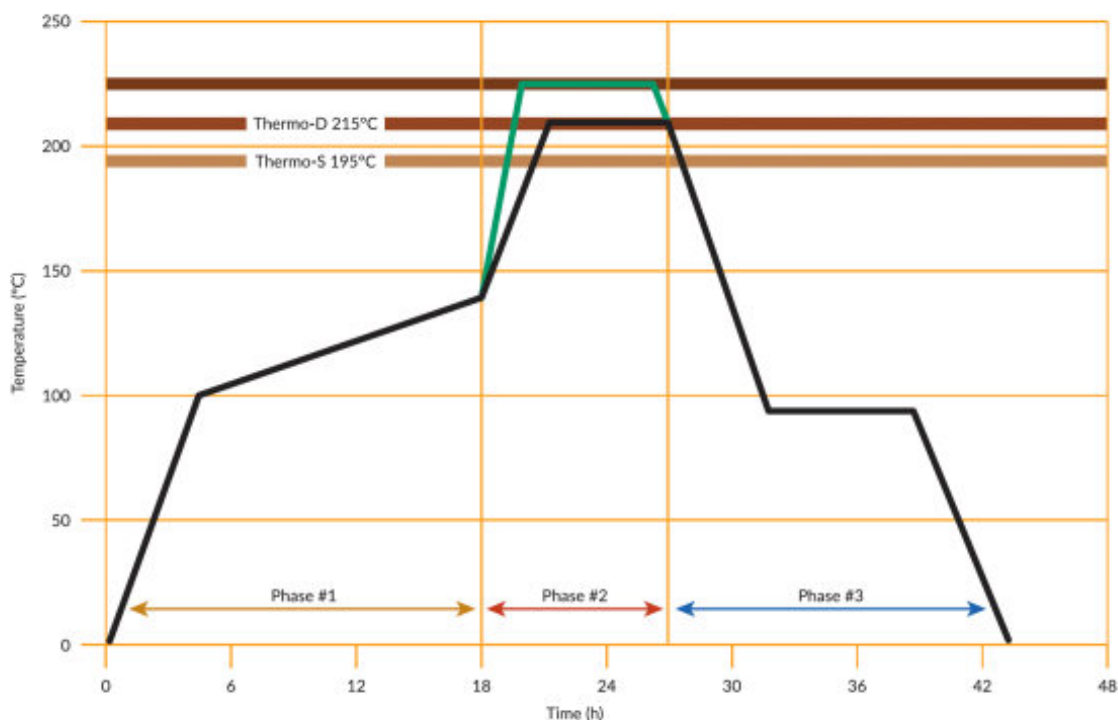


THERMALLY MODIFIED WOOD IS

- free of hazardous emissions
- with improved stability and durability
- naturally enhanced using only heat & steam

MODIFICATIONS



BRUSHING

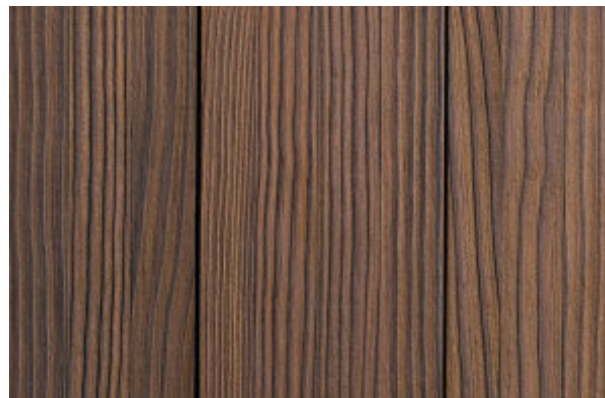

END MATCHING



PAINTED*

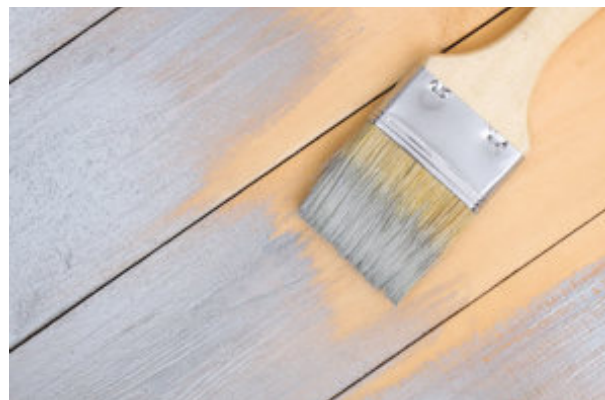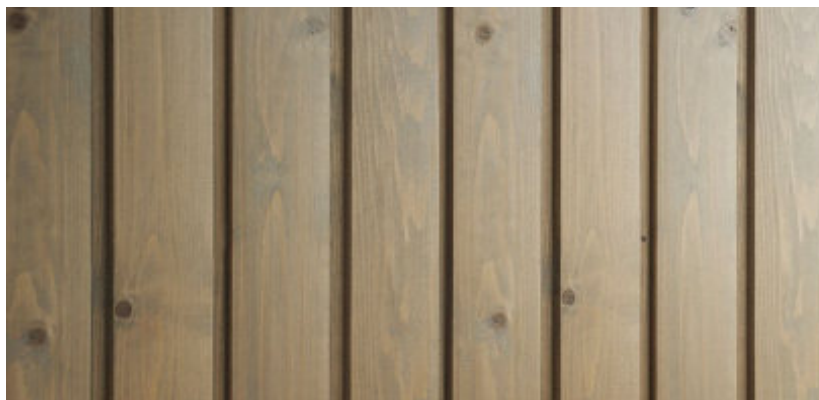

**Only by request*



O'Wood offers over a hundred modern ways of using wood in both interior and exterior settings, including saunas, cladding and decking.



CONTACT US



Reinis Nitišs

Production and export manager

Tel: +371 28312944

reinis@osukalns.lv